

WINSAFE[®] IP Keyboard Controller/CKB-E2UIP



Application

CKB-E2U IP keyboard controller controls PTZ camera in network and analog modes, accepting various protocols such as Visca, Pelco D/P ect. With rich shortcut buttons for common camera setting, it makes camera control super easy and fast.

Strong Control Ability

- ※ Camera control in IP and analog modes
- ※ Full VISCA, ONVIF, PELCO-D/P protocols
- ※ Support IE web setting, built-in web server makes the configuration interface simple and clear
- ※ Support POE



Camera	IP	Port	Protocol(network)	Baudrate	Address	Protocol(analog)	Operate
1	10.0.2.168	1258	VISCA(TCP)	9600	1	VISCA	✔
2	10.0.2.12	80	ONVIF	9600	2	VISCA	✔
3	10.0.2.237	1259	VISCA(TCP)	9600	3	VISCA	✔
4	10.0.2.115	1259	VISCA(TCP)	9600	4	VISCA	✔
5	192.168.5.170	1259	VISCA(UDP)	9600	5	VISCA	✔
6	192.168.5.170	1258	VISCA(UDP)	9600	6	VISCA	✔
7	192.168.5.170	1259	VISCA(UDP)	9600	7	VISCA	✔



Easy Operation

- * 7 Buttons to switch 7 cameras
- * 4D joystick control
- * Rocker witch controls zoom speed
- * Shortcut keys/knobs for common camera settings



Simple and Beautiful Apperance

- * TFT CD screen display
- * Elegant design

Technical Specification

Model No.	CKB-U2IP
White Balance	Button, Auto, Indoor, Outdoor, One Push, Manual
Exposure	Button, Auto, Manual, Shutter Priority, Iris Priority, Bright Priority
Shortcut Button	Bright Adjustment, Exposure Gain, BLC, Focus Model Selction, OSD
Shortcut Knob	R/B Gain, Iris, Pan/Tilt Speed(1-8 Steps), Zoom speed(1-8 Steps)
Protocol	Full VISCA, PELCO-D/P, ONVIF
Output	RS422, RS232, RS485, RJ45
Joystick	4D joystick
Screen	TFT LCD 320*240
Power Consumption	≤5W
Power	DC12V-2A
Work Temperature	-10°C - 55°C / 14°F - 131°F
Work Humidity	20% - 80% non-condensation
Size	321.6mm x 179.2mm x 105.7mm
Weight	1630g
Outer box size and specifications	553*460*350mm / 6 sets
weight	1.9KG

Dimension(mm)

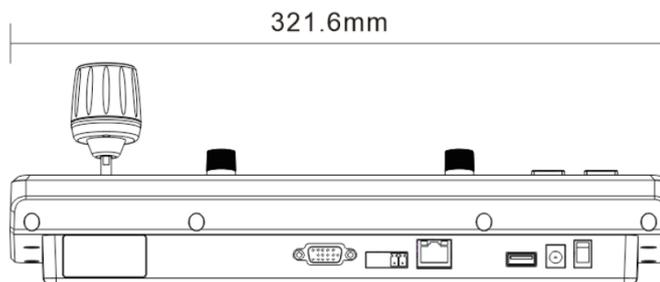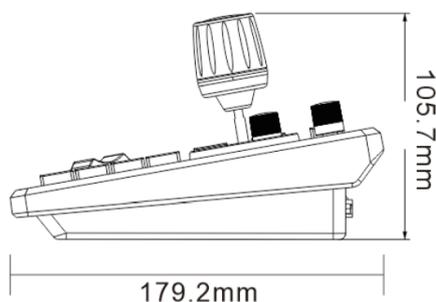

*** Product specification are subject to change without notice ***